
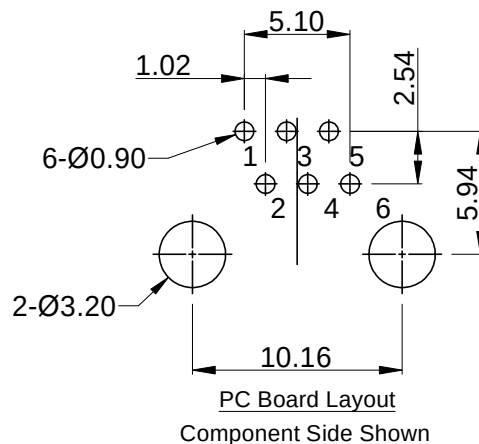
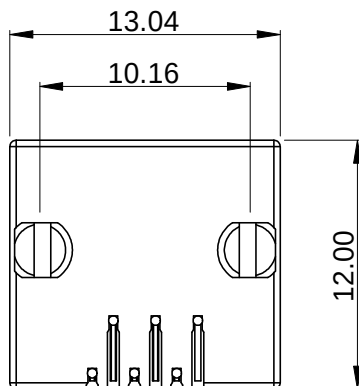
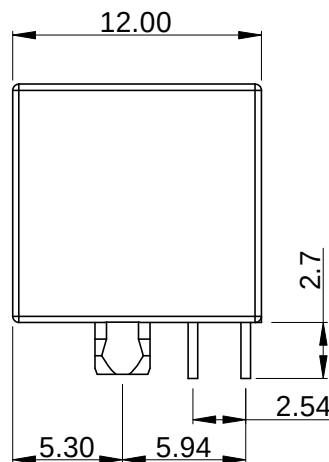


RoHS&REACH

REV.	DESCRIPTION	DATE
A	NEW	2025.1.2

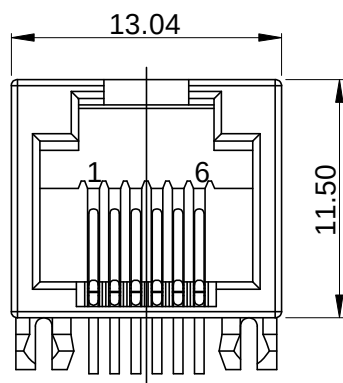

PC Board Layout
Component Side Shown

材料Material:

1. 外壳材质: PBT,PA46 (UL 94V-0)
Housing Material: PBT,PA46 (UL 94V-0)
2. 触点材料: 圆针直径0.46mm磷青铜; 镀镍后镀金
Contact Material: Round Pins-0.46mm Diameter
Phosphor Bronze;Gold Plating Over Nickel

电气Electrical:

1. 额定电压: 125伏
Voltage Rating : 125 V Rms
2. 额定电流: 1.5安培
Current Rating: 1.5 AMP
3. 接触电阻: 最大30毫欧
Contact Resistance: 30 Milliohms MaX
4. 绝缘电阻: 500V下, 绝缘最小500兆欧
Insulation Resistance: 500 megohms min @500V
5. 绝缘耐压: 50-60Hz 1000V AC, 1分钟
DIELECTRIC STRENGTH:1000V AC 50Hzor 60Hz, 1MIN.
6. 耐久: 插拔750次以上
Durability: 750 Cycles Min
7. 工作温度: -40℃ ~+85℃
Operation Temperature: -40℃ ~+85℃

5303 - X X X X X X					
Positions	Contacts	Ports	Plastic	Color	Gold Plating
6/8	2/4/6/8	1-1x1 2-1x2 3-1x3 4-1x4 5-1x5 n-1xn	1-PBT 2-PA46 3-Other	1-Black 2-Gray 3-Other	1-G/Fu" 2-1u" 3-3u" 4-6u" 5-15u" 6-30u" 7-Other

DRAWN BY:	FANG	TOLERANCE UNSPECIFIED		SIZE	1:1		恒连电子科技有限公司	EVERCOM ELECTRONIC TECHNOLOGY CO.,LTD
		X	±0.50 ±2.0"	UNIT:	mm			
CHECKED BY:	FANG	.X	±0.38 ±1.5"	SIZE:	A4	REV. A	TITLE: 5303 1x1 6P6C	
		.XX	±0.25 ±1.0"					
APPROVED BY:	DING	.XXX	±0.15 ±0.5"			PART NO: 5303-660XXX		http://www.chinarj45.com
		PROJECTION:		SHEET	1 OF 1			